


OPTI-MAG SENSOR SCHEMATIC

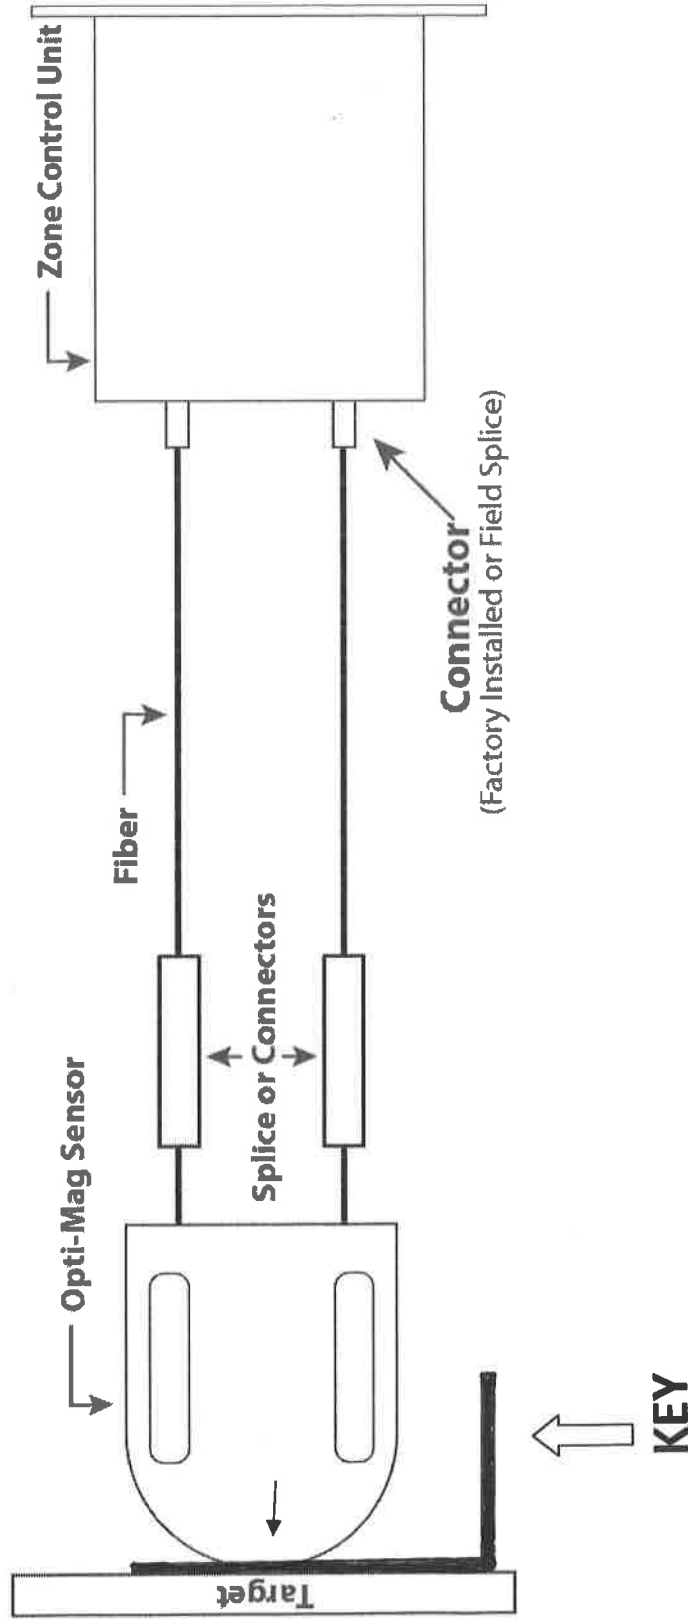

1. Insert the KEY between the target (gate) and sensor.
 - a. It can be inserted vertically or horizontally as long as it covers the center of the sensor.
2. The magnets in the sensor will hold the KEY in place.
3. The KEY keeps the sensor from activating an alert.
4. Open the target (gate).
5. Close the target (gate) when done.
6. Remove the KEY.