


FEATURES

- Splicing and Patching Capability
- Holds (2) LGX Adapter Plates
- Holds (1) Splice Bridge
- Single Outer Door
- Simple Cable Management Spool Included
- Rugged 16 Gauge Steel, Color Black

The FIS Mini Wall Mount features a single outer door with capacity for up to (2) standard LGX adapter plates and (1) F1-8731 Splice Bridge. Ideal for patching smaller quantities of fibers in a compact form factor. It also includes a cable management spool for routing cable within the enclosure.

TECH DRAWING

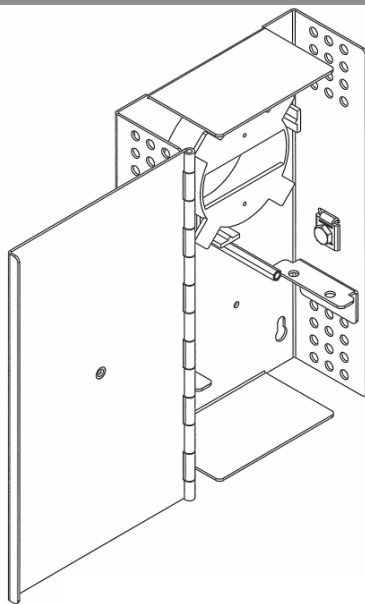

SPECIFICATIONS

Dimension	10"H x 6"W x 2.5"D
Capacity	(2) LGX Adapter Plates
Material	16 Gauge Steel
Weight	4 lbs
Coating	Electro Statically Powder Coat; Black

ORDERING INFORMATION

F1105818BLK	FIS Mini Wall Mount, Holds (2) Adapter Plates, Steel, Unloaded, Black
--------------------	---