


FEATURES

- Holds 2 or 4 LGX Style Adapter Plates or Cassette Modules (not included)
- Splicing and Patching Capability
- Dual Hinged Doors with Snap Latch-Security
- Removable Doors
- Cable Management Rings Included
- Multiple Cable Routing Options Possible
- Raised Splice Tray Stand holds 2 Trays (splice trays not Included)
- Pad Lock Eyelettes for Both Doors
- Top and Bottom Cable Entry Ports
- Can be ordered with terminated Cables, Adapters, Pigtails or Cassettes
- Rugged 14 Gauge Aluminum, Available in Black or Off-White (BW)

TECH DRAWING

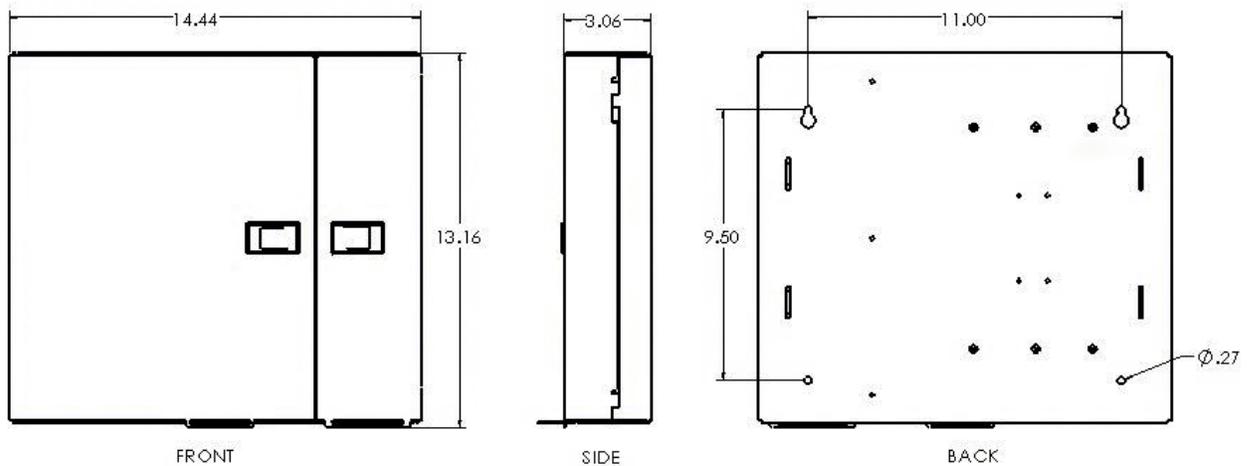

SPECIFICATIONS

Dimension	14.44" W x 13.16" H x 3.06" D
Capacity	2 Panel: Up to 16 Single Fiber Connections or 32 Duplex (LC) 4 Panel: Up to 32 Single Fiber Connections or 64 Duplex (LC)
Material	.060" Aluminum
Coating	Electro Statically Applied Powder Coat; Available in Black or Off-White

ORDERING INFORMATION

F1-DW2X	2-Panel w/Black Powder Coat
F1-DW2XBW	2-Panel w/Off-White Powder Coat
F1-DW4X	4-Panel w/Black Powder Coat
F1-DW4XBW	4-Panel w/Off-White Powder Coat

RECOMMENDED SPLICE TRAYS

F1-SPL12	Metal Splice Tray, 12 Position Fusion Splice Chip, 6.5" L x 4.7" W x .42" H
F1-SPL24	Metal Splice Tray, 24 Position Fusion Splice Chip, 11.72" L x 3.99" W x .42" H
F1-6808	Plastic Splice Tray, 12 Position Fusion Splice Chip, 7.1" L x 4.25" W x .48" H