


ARMORED FIBER CABLE

SPIRAL ARMORED TUBE , PU JACKET

OPTIONS

- Cable Length: 1000m, 2000m, $\pm 10\%$
- RoHS Compliant

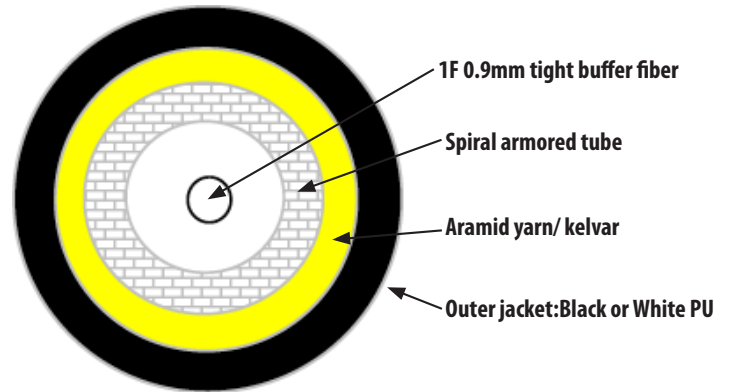

SPECIFICATIONS - CABLE PARAMETERS

Tight buffer fiber	mm	0.9 \pm 0.05mm	PVC coating
Spiral Armored Tube	mm	OD: 1.7 \pm 0.1mm ID: 1.2 \pm 0.1mm	Material: SUS204
Aramid yarn/ Kelvar	mm	4pcs 1100D	
Cable attenuation	dB/km	≤ 0.4 @ 1310nm, ≤ 0.3 @ 1550nm	G657A2
Outer Jacket OD	mm	3.0 \pm 0.1	Color: Black or White
Temperature	$^{\circ}$ C	Storage: -40 - 90 $^{\circ}$ C Installation: -30 - 80 $^{\circ}$ C	
Tensile	N	Long-term 200 short-term 300	
Crush	N/10cm	Long-term 3000 short-term 5000	