
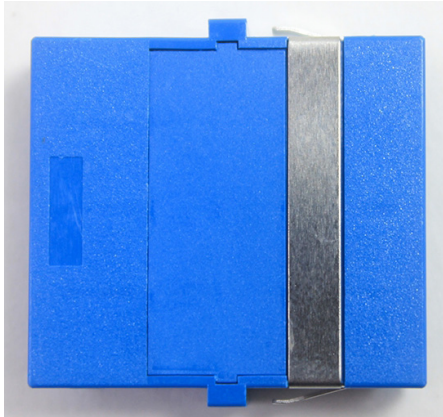


FIS LC QUAD MATING SLEEVES - NO FLANGE

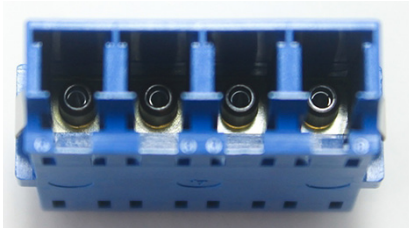

FEATURES

- LC Duplex Footprint
- Panel Mount Design
- Available in Singlemode or Multimode versions

APPLICATIONS

- Telecommunications
- Local area network
- CATV Distribution Networks



SPECIFICATIONS

Operating Temperature (°C)	-40°C to +70°C
Excess Loss	.1 dB or less Singlemode 15 dB or less Multimode

MATERIALS

Split Sleeve	Singlemode	Ceramic
	Multimode	Bronze
Body (ABS Plastic)		
F1-8045NF	Blue	Singlemode