



FIS LOOPBACK MODULES SC & LC

LC Loopback Module

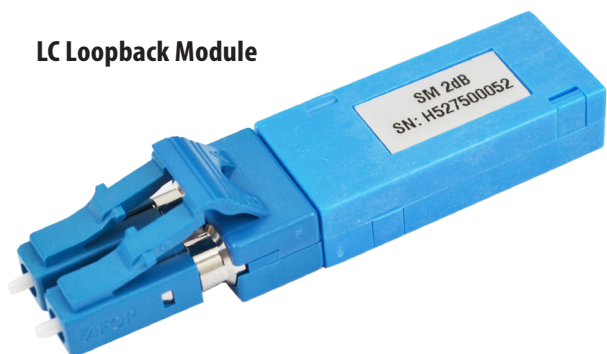

SC Loopback Module

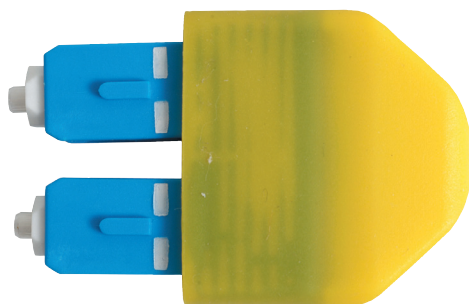

FEATURES

- Protective Rear Housing
- Compact Size

APPLICATIONS

- Telecommunications Systems
- SONET Networks
- CATV Distribution Networks
- Transceiver Testing

SPECIFICATIONS

Operating Temperature (°C)	-40°C to +85°C
Insertion Loss	2dB ±1 - Singlemode & Multimode

MATERIALS

Ferrules	Ceramic	
Body (ABS Plastic)	Blue	Singlemode
	Beige	Multimode
Fiber	9/125	Singlemode
	62.5/125 & 50/125	Multimode

ORDERING INFORMATION

F1-SCLB9A	SC 9µm/125
F1-SCLB6A	SC 62.5µm/125
F1-SCLB50A	SC 50µm/125
F1-LCLB9A	LC 9µm/125
F1-LCLB62A	LC 62.5µm/125
F1-LCLB50A	LC 50µm.125