


# FIS 600 SERIES ENCLOSURE

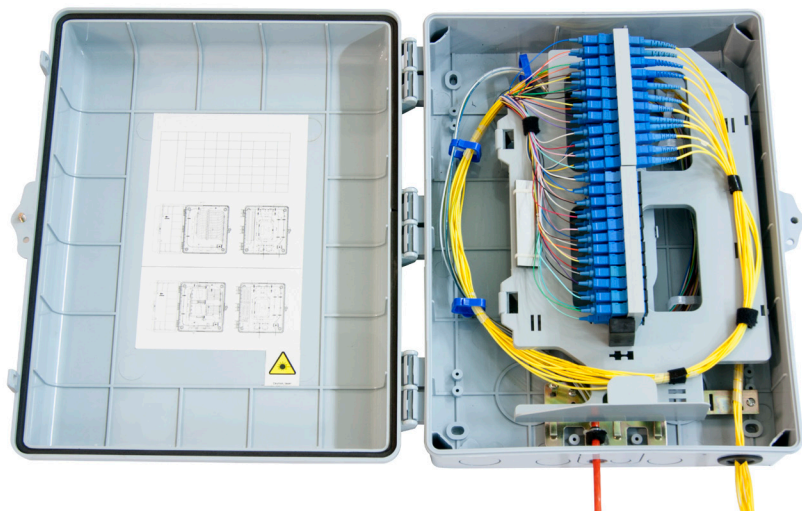

## FEATURES

- IP65 Rated.
- 48/96 Fiber Port Capacity.
- 6 Fiber Inlet 'Knockout' Ports.
- Polycarbonate, UV-Resistant.
- 100% Tested to Bellcore GR-326 Standards.
- Grounding Plate and Nut for Electrical Connections.

The 600 series is an outdoor enclosure designed for harsh environments outside of premises and mounting in FTTX applications. The enclosure features (6) fiber inlet ports with knockout holes, electrical grounding, integrated cable management rings, and (48) splice sleeve holders. It accommodates (48) SC simplex adapters or (48) LC duplex adapters and is compatible with flanged, 'style 3' adapters. The 600 series is constructed from a UV-resistant polycarbonate and rated to IP65. Ask your FIS sales representative about pre-loading enclosures with adapters, splitter packages and fiber pigtails.

## SPECIFICATIONS

<b>Dimensions</b>	340 mm(W) x 130 mm(D) x 420 mm(H)
<b>Capacity</b>	- 48 Port / Accepts (48) SC Simplex adapters (flanged) - 96 Port / Accepts (48) LC Duplex adapters (flanged)
<b>Material</b>	Polycarbonate
<b>Color</b>	RAL7035
<b>Weight</b>	2.87 lbs / empty

## ORDERING INFORMATION

<b>F1-600</b>	OSP Enclosure, Up to 96 Fibers (LC) with Splicing/Cable Management
<b>SC Simplex Adapters</b>	
<b>F13800BC</b>	FIS SC MM Adapter, Bronze Sleeve, Beige
<b>F18320</b>	FIS SC MM Adapter, Zirconia Sleeve, Black
<b>F18350</b>	FIS SC MM 50UM OM3 Adapter, Bronze Sleeve, Aqua
<b>F13810BC</b>	FIS SC SM/MM Adapter, Zirconia Sleeve, Blue
<b>F14800T</b>	FIS SC/APC Adapter, Zirconia Sleeve, Green
<b>LC Duplex Adapters</b>	
<b>F18030</b>	FIS LC Duplex MM Adapter, Beige
<b>F18050</b>	FIS LC MM Duplex Adapter, Aqua
<b>F18035</b>	FIS LC SM Duplex Adapter, Blue
<b>F18018</b>	FIS LC/APC SM Duplex Adapter, Green
<b>F1LCAD02R</b>	LC SM Duplex Adapter w/Shutter, Blue