


FIS NID - FIBER WALL PLATE

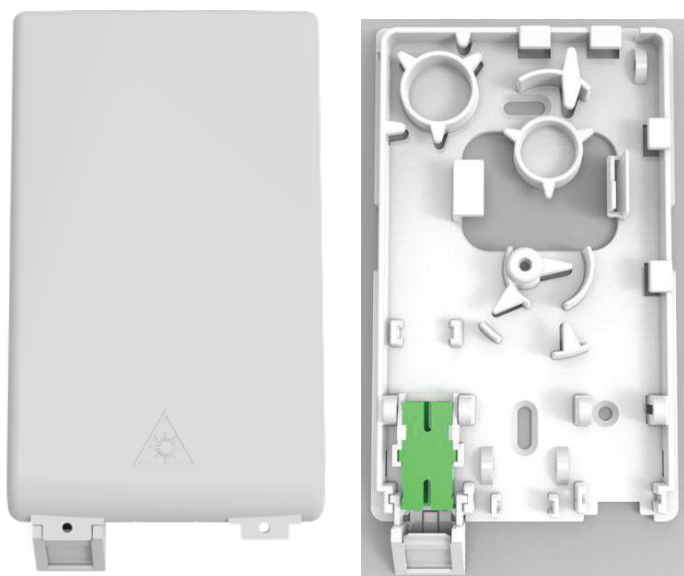

Z1WP-01SXX-W (Shown)

FEATURES

- Available with SC/APC shuttered adapter for protection of laser light or un-shuttered
- Option for 1 or 2 port unit
- Unique pivoting adapter holder that allows cleaning and inspection without disconnecting feeder fiber
- Visual Proper Connection Indication
- Integral slack storage with bend radius control for fiber routing
- Feeder cable entry from rear, top or bottom; accommodates up to 4.8mm cable
- Stores up to 48 inch of fiber slack
- Mounts directly on wall or single gang junction box
- Hardware-free, snap-on cover


FIS Fiber Wall Plates provide a demarcation point inside the home, office or apartment. Integral bend radius provides safe fiber routing and allows for slack storage outside of the wall cavity. Compact in size yet feature rich makes this an ideal wall plate for FTTH application.

SPECIFICATIONS


Material	Impact Resistant Plastic, Outdoor Rated, Telco Gray Color
Performance	Designed to meet GR-2898-CORE
Application	Indoor
Dimensions	5.25" L X 3.2" W X 0.75" D

ORDERING INFORMATION

Z1WP-01XX-W	Wall Plate, SC/APC on left side, White
Z1WP-01SXX-W	Wall Plate, Shuttered SC/APC on left side, White
Z1WP-0101-W	Wall Plate, SC/APC on left and right side, White
Z1WP-01S01S-W	Wall Plate, Shuttered SC/APC on left and right side, White
Z1WP-01SXX-W1	Wall Plate, SC/APC Integrated Shuttered on left side, 900µm Fiber Pigtail, White



Visual Proper Connection Indication: Using FIS' Shuttered Jumper with our wall plate, the Red Dot indicator assures proper fiber connection

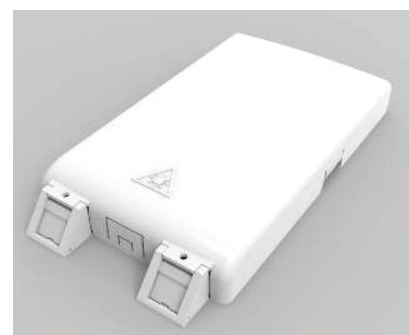

Z1WP-01S01S-W: 2-Port Version (shown)